

# SOPREMA INSONO

## Sopragrip DM

TECHNICAL DATA SHEET

ANZ-TDS-20-B-Sopragrip DM

WATERPROOFING  
SOUNDPROOFING

APPLICATIONS

INDOOR APPLICATIONS

BALCONIES

### DESCRIPTION

SOPREMA INSONO Sopragrip Detailing Membranes are composed of self-adhesive elastomeric waterproofing membrane with an exposed non-woven polyester reinforcement. The back of the membrane is protected by a release film.

INSONO Sopragrip Detailing Membranes are mainly used for the upstands and detailing in Insono Weldi System.

### INSTALLATION PROCEDURE

#### SUBSTRATE:

- Suitable for:
  - Properly prepared in situ, precast and tilt up concrete
  - Render
  - Screeds
  - Fibre-cement sheeting
  - Wet area grade plasterboard
  - PPA certified structural
  - Marine plywood
  - Scyon sheeting
- All surfaces to be waterproofed must be firm, clean, dry, sound and smooth. All laitance, grease, oil, wax, curing compounds, loose material, paint and any other contaminants which may reduce or prevent adhesion must be mechanically removed. Masonry surfaces must be pointed flush and surface defects repaired.
- New concrete must be cured for a minimum of 28 days. All concrete must be completely dry and primed. Render and cement screeds must be cured for a minimum of 7 days. Damp concrete, render or screeds must be allowed to thoroughly dry and primed. Fibre cement sheeting, water resistant plasterboard, PAA structural and marine plywood and Scyon sheeting must be installed in accordance with the manufacturers' installation requirements.

#### PRIMING:

- Apply the INSONO AF3 PRIMER to the prepared substrate by using a brush or roller in accordance with the relevant product's Technical Data Sheet.
- Allow the INSONO AF3 PRIMER to fully dry, tacky prior to commencing the application of INSONO AF3 membrane.

#### APPLICATION:

- **For waterproofing installation:**
  - Unroll membrane sheets onto the surface.
  - Starting at the low point, lay out the membrane to ensure the plies are installed perpendicular to the slope, shingled to prevent back-water laps.
  - Ensure specified 50mm side-laps and 80mm end-laps are maintained. End-laps should be staggered apart.
  - As the INSONO AF3 90 is unrolled, apply pressure on the topside of the ply to optimise the self-adhesive property automatically activated, and to get a full adhesion of the underface membrane to the primed substrate.
  - Adjust application methods to accommodate varying environmental conditions as necessary to achieve the desired results
  - For upturns and detailing, use **INSONO Sopragrip Detailing Membranes** (Refer to manufactures details).
- **For soundproofing installation:**
  - Position the INSONO AF3 anti-fracture and acoustic membrane parallel to the side walls with the release film facing down to the floor.
  - Unroll the membrane to a length of about 30 mm, and make sure that the membrane remains in the right position.
  - Pull back the unrolled portion of the membrane backward on top of the rest of the roll.
  - Prepare the concrete surface with INSONO AF3 ADHESIVE by SOPREMA.
  - Cut and peel off the silicon release film from the section of membrane unrolled previously.

Compliance with AS4858 / AS4654

Sound damping

Good traffic resistance

Rot proof

Excellent adhesion to mortar

# SOPREMA INSONO AF3

## Sopragrip DM



WATERPROOFING  
SOUNDPROOFING

APPLICATIONS

INDOOR APPLICATIONS

BALCONIES

TECHNICAL DATA SHEET

ANZ-TDS-20-B-Sopragrip DM

- On the wet adhesive, install **INSONO AF3-90** membranes parallel to the side walls. Then apply INSONO AF3 ADHESIVE on the other section of the roll, and install the rest of the roll on the wet adhesive.
- **For soundproofing only** install the membranes side-by-side without overlapping them while leaving a gap of 1.5 mm between them. Once the membranes are installed, press firmly with a membrane roller to ensure good adhesion. Let cure for 2 to 6 hours depending on conditions. Check the good adhesion of the INSONO AF3 membrane and then install ceramic tiles with approved polymer modified thin-set mortar.
- For upturns and detailing, use **INSONO Sopragrip Detailing Membranes** (Refer to manufactures details).

### TILING:

- With the surface being totally sound, dry, and clean, tiling may commence
- When tiling directly over Insono, a polymer modified cement based adhesives must be used.

FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR ENDUROFLEX REPRESENTATIVE.

### PACKAGING

SPECIFICATIONS	INSONO AF3-90
Surface	Non-woven polyester
Underface	Silicone release film
Thickness (CSIRO)	1.2 mm
Dimensions	0.17m x 16.76m
Weight	2.28 +- 0.1 kg
Rolls per pallet	180

### PROPERTIES

PROPERTIES	STANDARD	INSONO AF3-90
Crack-resistant test	ANSI 118.12-2010; par 5.4	Pass
R-value	-	0.045
Moisture Vapour Transmission Rate	ASTM E96	0.14 g/(m <sup>2</sup> .24h)
Tensile strength (MD/CMD)	AS 1145 (at 23°C)	60.3 / 30.2 N/50 mm
Elongation at break initial (MD/CMD)		29 % / 48 %
Elongation at break ( 56D water immersion)		PASS
( 56D water immersion in a bleach solution)		PASS
( 56D water immersion in a detergent solution)	PASS	
( 7D heat ageing)	PASS	
Cyclic Fatigue (at 23°C)	CSIRO	PASS
Water absorption Weathering side up	AS 4858	0.725 %
Water absorption Weathering side down	AS 4858	0.10 %
Surface burning characteristics of building materials	ASTM E84-17 (INSONO AF3-130+tiles)	-

# SOPREMA INSONO AF3

## Sopragrip DM



WATERPROOFING  
SOUNDPROOFING

APPLICATIONS

INDOOR APPLICATIONS

BALCONIES

TECHNICAL DATA SHEET

ANZ-TDS-20-B-Sopragrip DM

### ACOUSTIC PROPERTIES

ASSEMBLIES	LABORATORY TESTS		FIELD TESTS	
	STC (1)	IIC (2)	ASTC (3)	AIIC (4)
INSONO AF3-90 + ceramic tiles + concrete slab 20 cm	53	47	53-56	52-56
INSONO AF3-90 + ceramic tiles + concrete slab 20 cm + drop ceiling (ACOUSTIVIBE CDC + cellulose + 2 gypsum boards 15.9 mm)	63	60	-	-

(1) **STC** : Standard test method for laboratory measurement of airborne sound transmission loss of building partition. Tests in compliance with the ASTM E90-09 standard.


(2) **IIC** : Standard test method for laboratory measurement of impact sound transmission through floor-ceiling assemblies using the tapping machine. Tests in compliance with the ASTM E492-09 standard.

(3) **ASTC (FSTC)** : Field Sound Transmission Class. Tests in compliance with the ASTM E336-11 and ASTM E413 standards.\*

(4) **AIIC (FIIC)** : Field Impact Insulation Class. Tests in compliance with the ASTM E007-11 and ASTM E989-11 standards.\*

\*ASTC and AIIC results are presented for information purposes only. Equivalent performance cannot be guaranteed by SOPREMA.

### VISUAL

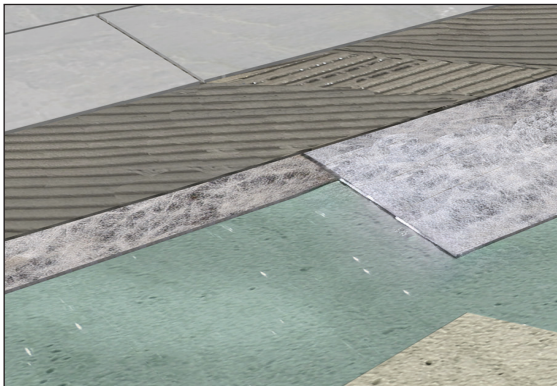

### LIMITATION

- Do not use pre-mixed products to adhere the tiles to the surface of the **INSONO AF3**.
- Do not use on cracks larger than 10 mm.

### STORAGE AND HANDLING

Rolls must be stored upright. If the products are stored outdoors, cover them with an opaque protection cover after removal of the delivery packaging.

### STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this publication is based on the present state of our best knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by Commonwealth or State Legislation. The owner, their representative and/or the contractor are responsible for checking the suitability of products for their intended use.

## SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen) Soprema Australia Pty Ltd

Chemwatch Hazard Alert Code: 1

 Chemwatch: 5430-11  
 Version No: 2.1.1.1  
 Safety Data Sheet according to WHS and ADG requirements

 Issue Date: 20/10/2020  
 Print Date: 21/10/2020  
 L.GHS.AUS.EN

### SECTION 1 Identification of the substance / mixture and of the company / undertaking

#### Product Identifier

Product name	SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)
Synonyms	Not Available
Other means of identification	Not Available

#### Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses	Membranes are used for all types of roofing needs, air barrier and waterproofing protection. NOTE: Under normal use, product is not expected to create any health hazard.
--------------------------	---

#### Details of the supplier of the safety data sheet

Registered company name	Soprema Australia Pty Ltd
Address	100 Barangaroo Avenue Sydney NSW 2000 Australia
Telephone	+61 3 9221 6230
Fax	Not Available
Website	<a href="http://soprema.com.au">soprema.com.au</a>
Email	info@soprema.com.au

#### Emergency telephone number

Association / Organisation	Soprema Australia Pty Ltd
Emergency telephone numbers	+61 3 9221 6230 (Mon-Fri 8am to 5pm)
Other emergency telephone numbers	Not Available

### SECTION 2 Hazards identification

#### Classification of the substance or mixture

Poisons Schedule	Not Applicable
Classification [1]	Not Applicable

#### Label elements

Hazard pictogram(s)	Not Applicable
Signal word	<b>Not Applicable</b>

#### Hazard statement(s)

Not Applicable

#### Precautionary statement(s) Prevention

Not Applicable

#### Precautionary statement(s) Response

Not Applicable

#### Precautionary statement(s) Storage

Not Applicable

#### Precautionary statement(s) Disposal

Not Applicable

### SECTION 3 Composition / information on ingredients

#### Substances

See section below for composition of Mixtures

#### Mixtures

CAS No	%[weight]	Name
Not Available		membrane contains, bituminous blend of;

**SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)**

CAS No	%[weight]	Name
8052-42-4	0-35	<u>bitumen road making</u>
64742-52-5.	0-15	<u>naphthenic distillate, heavy, hydrotreated (severe)</u>
471-34-1	0-30	<u>calcium carbonate</u>
14808-60-7	8-12	<u>silica crystalline - quartz</u>
1318-33-8	3.5-7.5	<u>dicalcium hexaborate pentahydrate</u>
9003-55-8	0-7.5	<u>styrene/ butadiene copolymer</u>
9002-88-4	0-6.3	<u>polyethylene</u>
14807-96-6	2.1-3.9	<u>talc</u>
65997-17-3	0.1-1.4	<u>glass oxide</u>

**SECTION 4 First aid measures**

**Description of first aid measures**

<b>Eye Contact</b>	<p>If this product comes in contact with the eyes:</p> <ul style="list-style-type: none"> <li>▶ Wash out immediately with fresh running water.</li> <li>▶ Ensure complete irrigation of the eye by keeping eyelids apart and away from eye and moving the eyelids by occasionally lifting the upper and lower lids.</li> <li>▶ Seek medical attention without delay; if pain persists or recurs seek medical attention.</li> <li>▶ Removal of contact lenses after an eye injury should only be undertaken by skilled personnel.</li> </ul>
<b>Skin Contact</b>	<p>If skin contact occurs:</p> <ul style="list-style-type: none"> <li>▶ Immediately remove all contaminated clothing, including footwear.</li> <li>▶ Flush skin and hair with running water (and soap if available).</li> <li>▶ Seek medical attention in event of irritation.</li> <li>▶ Immediately drench burn area in cold running water.</li> <li>▶ If hot bitumen adheres to the skin, <b>DO NOT attempt to remove it (it acts as a sterile dressing)</b>.</li> <li>▶ For burns to the head and neck and trunk, apply cold wet towels to the burn area, and change frequently to maintain cooling.</li> <li>▶ Cooling should be maintained for no longer than thirty minutes.</li> <li>▶ When hot bitumen completely encircles a limb, it may have a tourniquet effect and should be split as it cools.</li> <li>▶ Transport to hospital or doctor.</li> </ul> <p>In case of burns:</p> <ul style="list-style-type: none"> <li>▶ Immediately apply cold water to burn either by immersion or wrapping with saturated clean cloth.</li> <li>▶ <b>DO NOT remove or cut away clothing over burnt areas. DO NOT pull away clothing which has adhered to the skin as this can cause further injury.</b></li> <li>▶ <b>DO NOT break blister or remove solidified material.</b></li> <li>▶ Quickly cover wound with dressing or clean cloth to help prevent infection and to ease pain.</li> <li>▶ For large burns, sheets, towels or pillow slips are ideal; leave holes for eyes, nose and mouth.</li> <li>▶ <b>DO NOT apply ointments, oils, butter, etc. to a burn under any circumstances.</b></li> <li>▶ Water may be given in small quantities if the person is conscious.</li> <li>▶ Alcohol is not to be given under any circumstances.</li> <li>▶ Reassure.</li> <li>▶ Treat for shock by keeping the person warm and in a lying position.</li> <li>▶ Seek medical aid and advise medical personnel in advance of the cause and extent of the injury and the estimated time of arrival of the patient.</li> </ul>
<b>Inhalation</b>	<ul style="list-style-type: none"> <li>▶ If fumes or combustion products are inhaled remove from contaminated area.</li> <li>▶ Lay patient down. Keep warm and rested.</li> <li>▶ Prostheses such as false teeth, which may block airway, should be removed, where possible, prior to initiating first aid procedures.</li> <li>▶ Apply artificial respiration if not breathing, preferably with a demand valve resuscitator, bag-valve mask device, or pocket mask as trained. Perform CPR if necessary.</li> <li>▶ Transport to hospital, or doctor.</li> </ul>
<b>Ingestion</b>	<ul style="list-style-type: none"> <li>▶ Not considered a normal route of entry.</li> <li>▶ <b>If swallowed do NOT induce vomiting.</b></li> <li>▶ If vomiting occurs, lean patient forward or place on left side (head-down position, if possible) to maintain open airway and prevent aspiration.</li> <li>▶ Observe the patient carefully.</li> <li>▶ Never give liquid to a person showing signs of being sleepy or with reduced awareness; i.e. becoming unconscious.</li> <li>▶ Give water to rinse out mouth, then provide liquid slowly and as much as casualty can comfortably drink.</li> <li>▶ Seek medical advice.</li> </ul>

**Indication of any immediate medical attention and special treatment needed**

Treat symptomatically.

**SECTION 5 Firefighting measures**

**Extinguishing media**

- ▶ Foam.
- ▶ Dry chemical powder.
- ▶ BCF (where regulations permit).
- ▶ Carbon dioxide.
- ▶ Water spray or fog - Large fires only.

**Special hazards arising from the substrate or mixture**

<b>Fire Incompatibility</b>	None known.
-----------------------------	-------------

**Advice for firefighters**

<b>Fire Fighting</b>	<ul style="list-style-type: none"> <li>▶ Alert Fire Brigade and tell them location and nature of hazard.</li> <li>▶ Wear full body protective clothing with breathing apparatus.</li> </ul>
----------------------	---

**SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)**

	<ul style="list-style-type: none"> <li>▶ Prevent, by any means available, spillage from entering drains or water course.</li> <li>▶ Use water delivered as a fine spray to control fire and cool adjacent area.</li> <li>▶ Avoid spraying water onto liquid pools.</li> <li>▶ <b>DO NOT</b> approach containers suspected to be hot.</li> <li>▶ Cool fire exposed containers with water spray from a protected location.</li> <li>▶ If safe to do so, remove containers from path of fire.</li> </ul>
<b>Fire/Explosion Hazard</b>	<ul style="list-style-type: none"> <li>▶ Combustible.</li> <li>▶ Slight fire hazard when exposed to heat or flame.</li> <li>▶ Heating may cause expansion or decomposition leading to violent rupture of containers.</li> <li>▶ On combustion, may emit toxic fumes of carbon monoxide (CO).</li> <li>▶ May emit acrid smoke.</li> <li>▶ Mists containing combustible materials may be explosive.</li> </ul> <p>Combustion products include: carbon dioxide (CO<sub>2</sub>) sulfur oxides (SO<sub>x</sub>) hydrogen sulfide (H<sub>2</sub>S) other pyrolysis products typical of burning organic material.</p> <p><b>NOTE:</b> Burns with intense heat. Produces melting, flowing, burning liquid and dense acrid black smoke. May emit poisonous fumes. May emit corrosive fumes.</p>
<b>HAZCHEM</b>	Not Applicable

**SECTION 6 Accidental release measures**

**Personal precautions, protective equipment and emergency procedures**

See section 8

**Environmental precautions**

See section 12

**Methods and material for containment and cleaning up**

<b>Minor Spills</b>	<ul style="list-style-type: none"> <li>▶ Clean up all spills immediately.</li> <li>▶ Secure load if safe to do so.</li> <li>▶ Bundle/collect recoverable product.</li> <li>▶ Collect remaining material in containers with covers for disposal.</li> </ul>
<b>Major Spills</b>	<p>If hot material is spilled, allow enough time to cool completely and remove to a container for disposal.</p> <ul style="list-style-type: none"> <li>▶ Minor hazard.</li> <li>▶ Clear area of personnel.</li> <li>▶ Alert Fire Brigade and tell them location and nature of hazard.</li> <li>▶ Wear physical protective gloves e.g. Leather.</li> <li>▶ Contain spill/secure load if safe to do so.</li> <li>▶ Bundle/collect recoverable product and label for recycling.</li> <li>▶ Collect remaining product and place in appropriate containers for disposal.</li> <li>▶ Clean up/sweep up area.</li> <li>▶ Water may be required.</li> </ul>

Personal Protective Equipment advice is contained in Section 8 of the SDS.

**SECTION 7 Handling and storage**

**Precautions for safe handling**

<b>Safe handling</b>	<p>Torch, used to weld waterproofing membranes, can produce temperatures beyond 100C. Avoid all contact with materials sensitive to these temperatures, as lead or plastics materials. Never work in an enclosed area where vapours can accumulate.</p> <ul style="list-style-type: none"> <li>▶ Limit all unnecessary personal contact.</li> <li>▶ Wear protective clothing when risk of exposure occurs.</li> <li>▶ Use in a well-ventilated area.</li> <li>▶ <b>When handling DO NOT eat, drink or smoke.</b></li> <li>▶ Always wash hands with soap and water after handling.</li> <li>▶ Avoid physical damage to containers.</li> <li>▶ Use good occupational work practice.</li> <li>▶ Observe manufacturer's storage and handling recommendations contained within this SDS.</li> </ul>
<b>Other information</b>	<ul style="list-style-type: none"> <li>▶ Keep dry</li> </ul>

**Conditions for safe storage, including any incompatibilities**

<b>Suitable container</b>	<ul style="list-style-type: none"> <li>▶ Packaging as recommended by manufacturer.</li> <li>▶ Check that containers are clearly labelled</li> </ul>
<b>Storage incompatibility</b>	<ul style="list-style-type: none"> <li>▶ Avoid reaction with oxidising agents</li> <li>▶ Avoid strong acids, acid chlorides, acid anhydrides and chloroformates.</li> </ul>

**SECTION 8 Exposure controls / personal protection**

**Control parameters**

Occupational Exposure Limits (OEL)

**INGREDIENT DATA**

Source	Ingredient	Material name	TWA	STEL	Peak	Notes
--------	------------	---------------	-----	------	------	-------

**SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)**

Source	Ingredient	Material name	TWA	STEL	Peak	Notes
Australia Exposure Standards	bitumen road making	Bitumen fumes	5 mg/m3	Not Available	Not Available	Not Available
Australia Exposure Standards	naphthenic distillate, heavy, hydrotreated (severe)	Oil mist, refined mineral	5 mg/m3	Not Available	Not Available	Not Available
Australia Exposure Standards	calcium carbonate	Calcium carbonate	10 mg/m3	Not Available	Not Available	(a) This value is for inhalable dust containing no asbestos and < 1% crystalline silica.
Australia Exposure Standards	silica crystalline - quartz	Silica - Crystalline: Quartz (respirable dust)	0.05 mg/m3	Not Available	Not Available	Not Available
Australia Exposure Standards	talc	Talc, (containing no asbestos fibres)	2.5 mg/m3	Not Available	Not Available	Not Available

**Emergency Limits**

Ingredient	Material name	TEEL-1	TEEL-2	TEEL-3
bitumen road making	Petroleum asphalt; (Bitumen)	30 mg/m3	330 mg/m3	2,000 mg/m3
naphthenic distillate, heavy, hydrotreated (severe)	Distillates (petroleum) hydrotreated heavy naphthenic	140 mg/m3	1,500 mg/m3	8,900 mg/m3
calcium carbonate	Carbonic acid, calcium salt	45 mg/m3	210 mg/m3	1,300 mg/m3
silica crystalline - quartz	Silica, crystalline-quartz; (Silicon dioxide)	0.075 mg/m3	33 mg/m3	200 mg/m3
polyethylene	Polyethylene	16 mg/m3	170 mg/m3	1,000 mg/m3
glass, oxide	Fibrous glass; (Fiber glass; Glass frit; Synthetic vitreous fibers)	15 mg/m3	170 mg/m3	990 mg/m3

Ingredient	Original IDLH	Revised IDLH
bitumen road making	Not Available	Not Available
naphthenic distillate, heavy, hydrotreated (severe)	2,500 mg/m3	Not Available
calcium carbonate	Not Available	Not Available
silica crystalline - quartz	25 mg/m3 / 50 mg/m3	Not Available
dicalcium hexaborate pentahydrate	Not Available	Not Available
styrene/ butadiene copolymer	Not Available	Not Available
polyethylene	Not Available	Not Available
talc	1,000 mg/m3	Not Available
glass, oxide	Not Available	Not Available

**Occupational Exposure Banding**

Ingredient	Occupational Exposure Band Rating	Occupational Exposure Band Limit
dicalcium hexaborate pentahydrate	C	> 0.1 to ≤ milligrams per cubic meter of air (mg/m³)


**Notes:** Occupational exposure banding is a process of assigning chemicals into specific categories or bands based on a chemical's potency and the adverse health outcomes associated with exposure. The output of this process is an occupational exposure band (OEB), which corresponds to a range of exposure concentrations that are expected to protect worker health.

**MATERIAL DATA**

NOTE H: Special requirements exist in relation to classification and labelling of this substance. This note applies to certain coal- and oil -derived substances and to certain entries for groups of substances in Annex VI. European Union (EU) List of harmonised classification and labelling hazardous substances, Table 3.1, Annex VI, Regulation (EC) No 1272/2008 (CLP) - up to the latest ATP

NOTE L: The classification as a carcinogen need not apply if it can be shown that the substance contains less than 3% DMSO extract as measured by IP 346. European Union (EU) List of harmonised classification and labelling hazardous substances, Table 3.1, Annex VI, Regulation (EC) No 1272/2008 (CLP) - up to the latest ATP

**Exposure controls**

<b>Appropriate engineering controls</b>	General exhaust is adequate under normal operating conditions.
<b>Personal protection</b>	
<b>Eye and face protection</b>	<ul style="list-style-type: none"> <li>▶ Safety glasses with side shields; or as required,</li> <li>▶ Chemical goggles.</li> <li>▶ Contact lenses may pose a special hazard; soft contact lenses may absorb and concentrate irritants. A written policy document, describing the wearing of lenses or restrictions on use, should be created for each workplace or task. This should include a review of lens absorption and adsorption for the class of chemicals in use and an account of injury experience. Medical and first-aid personnel should be trained in their removal and suitable equipment should be readily available. In the event of chemical exposure, begin eye irrigation immediately and remove contact lens as soon as practicable. Lens should be removed at the first signs of eye redness or irritation - lens should be removed in a clean environment only after workers have washed hands thoroughly. [CDC NIOSH Current Intelligence Bulletin 59], [AS/NZS 1336 or national equivalent]</li> </ul>
<b>Skin protection</b>	See Hand protection below
<b>Hands/feet protection</b>	Wear general protective gloves, eg. light weight rubber gloves.
<b>Body protection</b>	See Other protection below

**SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)**

<b>Other protection</b>	No special equipment needed when handling small quantities. <b>OTHERWISE:</b> <ul style="list-style-type: none"> <li>▶ Overalls.</li> <li>▶ Barrier cream.</li> <li>▶ Eyewash unit.</li> </ul>
-------------------------	--

**Respiratory protection**

Type A-P Filter of sufficient capacity. (AS/NZS 1716 & 1715, EN 143:2000 & 149:2001, ANSI Z88 or national equivalent)

Where the concentration of gas/particulates in the breathing zone, approaches or exceeds the "Exposure Standard" (or ES), respiratory protection is required. Degree of protection varies with both face-piece and Class of filter; the nature of protection varies with Type of filter.

Required Minimum Protection Factor	Half-Face Respirator	Full-Face Respirator	Powered Air Respirator
up to 10 x ES	A-AUS P2	-	A-PAPR-AUS / Class 1 P2
up to 50 x ES	-	A-AUS / Class 1 P2	-
up to 100 x ES	-	A-2 P2	A-PAPR-2 P2 ^

^ - Full-face

A(All classes) = Organic vapours, B AUS or B1 = Acid gasses, B2 = Acid gas or hydrogen cyanide(HCN), B3 = Acid gas or hydrogen cyanide(HCN), E = Sulfur dioxide(SO2), G = Agricultural chemicals, K = Ammonia(NH3), Hg = Mercury, NO = Oxides of nitrogen, MB = Methyl bromide, AX = Low boiling point organic compounds(below 65 degC)

**SECTION 9 Physical and chemical properties**

**Information on basic physical and chemical properties**

<b>Appearance</b>	Coloured membrane with asphalt odour.		
<b>Physical state</b>	Manufactured	<b>Relative density (Water = 1)</b>	Not Applicable
<b>Odour</b>	Not Available	<b>Partition coefficient n-octanol / water</b>	Not Available
<b>Odour threshold</b>	Not Available	<b>Auto-ignition temperature (°C)</b>	Not Applicable
<b>pH (as supplied)</b>	Not Applicable	<b>Decomposition temperature</b>	Not Applicable
<b>Melting point / freezing point (°C)</b>	Not Applicable	<b>Viscosity (cSt)</b>	Not Applicable
<b>Initial boiling point and boiling range (°C)</b>	Not Applicable	<b>Molecular weight (g/mol)</b>	Not Applicable
<b>Flash point (°C)</b>	Not Applicable	<b>Taste</b>	Not Available
<b>Evaporation rate</b>	Not Applicable	<b>Explosive properties</b>	Not Available
<b>Flammability</b>	Not Applicable	<b>Oxidising properties</b>	Not Available
<b>Upper Explosive Limit (%)</b>	Not Applicable	<b>Surface Tension (dyn/cm or mN/m)</b>	Not Applicable
<b>Lower Explosive Limit (%)</b>	Not Applicable	<b>Volatile Component (%vol)</b>	Not Applicable
<b>Vapour pressure (kPa)</b>	Not Applicable	<b>Gas group</b>	Not Available
<b>Solubility in water</b>	Not Applicable	<b>pH as a solution (1%)</b>	Not Applicable
<b>Vapour density (Air = 1)</b>	Not Applicable	<b>VOC g/L</b>	Not Applicable

**SECTION 10 Stability and reactivity**

<b>Reactivity</b>	See section 7
<b>Chemical stability</b>	Product is considered stable and hazardous polymerisation will not occur.
<b>Possibility of hazardous reactions</b>	See section 7
<b>Conditions to avoid</b>	See section 7
<b>Incompatible materials</b>	See section 7
<b>Hazardous decomposition products</b>	See section 5

**SECTION 11 Toxicological information**

**Information on toxicological effects**

<b>Inhaled</b>	Not normally a hazard due to physical form of product. Acute exposure to bitumen/ asphalt vapours may cause coughing, chest tightness, headache, muscle weakness, dizziness, tiredness, poor coordination, and even nausea and vomiting. Workers exposed to hot blown bitumens show bronchitis, rhinitis, oropharyngitis and laryngitis; symptoms include cough, phlegm, burning of the throat and chest, hoarseness, headache and nasal discharge. Guinea pigs, rabbits and mice exposed to blown bitumen fumes, aerosols and smoke, developed patchy regions of emphysema, bronchiolar dilation, pneumonitis, and severe localised bronchitis. Mice, exposed to aerosols of petroleum bitumens and smoke from heated petroleum bitumens, showed congestion, acute bronchitis, pneumonitis, bronchial dilation, abscess formation, epithelial atrophy, and necrosis. In health studies in the workplace, environmental measurement showed concentrations of asphalt, ranging from "non-detectable", where there was good mechanical ventilation, to 40 mg/m3, where there was very poor natural draft. Breathing zone samples, collected during drum-filling operations, ranged from 1.0 (upwind) to 5 mg/m3 (downwind) as means of 4-hour exposures. In the opinion of industrial hygienists conducting these studies, work conditions were satisfactory where asphalt fumes were kept below 10 mg/m3
----------------	---

**SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)**

<b>Ingestion</b>	Not normally a hazard due to the physical form of product. The material is a physical irritant to the gastro-intestinal tract
<b>Skin Contact</b>	Skin contact can cause mechanical irritation, if membrane is torch-applied, asphalt fumes can cause irritation. Not normally a hazard due to physical form of product.
<b>Eye</b>	Contact with this product at high temperature can cause thermal burns. Not normally a hazard due to physical form of product. Workers exposed to fumes of blown bitumens developed keratoconjunctivitis.
<b>Chronic</b>	<p>▸ Generally not applicable.</p> <p>Chronic exposure to bitumen/ asphalt fumes, over extended periods, may cause central nervous system depression, and liver and kidney changes. Chronic bitumen/ asphalt poisoning may result in a decrease in the number of white and red blood cells. [ILO Encyclopedia]</p> <p>Prolonged contact with bitumens may produce irritation, inflammation, dermatitis, acne-like lesions, keratoses, melanosis and photosensitisation. Animal inhalation studies do NOT yield sufficient evidence of bitumen/ asphalt-induced lung cancer. It is generally accepted that oxidation of polycyclic aromatic hydrocarbons (PAHs) destroys their carcinogenic potential and the differing character of the polycyclic aromatic fraction of petroleum asphalt fume and those of coal tar pitch volatiles suggested a lessened potential for carcinogenicity.</p> <p>Inhalation of fumes of heated bitumens by guinea pigs and rats produced chronic fibrosing pneumonitis with peribronchial adenomatosis; rats developed squamous cell metaplasias.</p> <p>Various extracts of steam-refined and air-refined bitumens and their mixtures, undiluted steam-refined bitumens and cracking residue bitumens, produced skin tumours following application to mouse skin. Subcutaneous injection in mice and rats, of steam- and air- refined bitumens, produced sarcomas at the sites of injection. Application of air-refined bitumens, in toluene, to the skin of mice, produced skin tumours. No tumours were produced by the undiluted bitumen. A pooled mixture of steam- and air-blown petroleum bitumen in benzene, produced tumours at the site of application to mouse skin.</p> <p>No significant difference was found in the health of asphalt workers and of groups of controls in a study conducted in 25 oil refineries. Other studies have not demonstrated health defects in paving and roofing operations (using asphalt-based products) and interstate trucking over asphalt highways.</p> <p><i>NOTE: The term bitumen and asphalt are often used interchangeably and have been used to describe products derived from petroleum and/ or coal. Asphalt is a native mixture of hydrocarbons which occurs as an amorphous, brownish-black solid or semisolid and results from the evaporation of the lighter hydrocarbons from petroleum and partial oxidation of the residue. Petroleum asphalts (bitumens) should therefore be differentiated from coal pitch bitumens which result from the destructive distillation of coal.</i></p> <p><i>The term "asphalt" originally applied to "Trinidad asphalt" which is a mined solid and is closely related to gilsonite.</i></p> <p>On occasion there are reports of epidemiological studies which have found an increased cancer mortality in workers exposed to heated bitumens and bitumen fumes. There are reports of significantly increased incidence of cancers of the mouth, oesophagus, rectum and lung. The bitumens, used by this cohort, are likely to have their origin in coal and should be distinguished from materials derived from the petroleum industry (the asphalts).</p> <p>Hardened bitumens/ asphalts do not normally constitute a health hazard. Mined sources of bitumens/ asphalts may present an additional hazard related to their naturally occurring content of quartz. Chronic inhalation of high levels of quartz dusts may produce silicosis, a disabling form of pneumoconiosis which may lead to scarring of the lining of the air-sacs of the lung.</p>

<b>SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	Not Available	Not Available
<b>bitumen road making</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	Not Available	Eye: no adverse effect observed (not irritating) <sup>[1]</sup> Skin: no adverse effect observed (not irritating) <sup>[1]</sup>
<b>naphthenic distillate, heavy, hydrotreated (severe)</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	Oral (rat) LD50: >5000 mg/kg <sup>[2]</sup>	Eye: no adverse effect observed (not irritating) <sup>[1]</sup> Skin: no adverse effect observed (not irritating) <sup>[1]</sup>
<b>calcium carbonate</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	Oral (rat) LD50: 6450 mg/kg <sup>[2]</sup>	Eye (rabbit): 0.75 mg/24h - SEVERE
		Eye: no adverse effect observed (not irritating) <sup>[1]</sup>
		Skin (rabbit): 500 mg/24h-moderate Skin: no adverse effect observed (not irritating) <sup>[1]</sup>
<b>silica crystalline - quartz</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	0.3 mg/kg <sup>[2]</sup>	Not Available
	50 mg/kg <sup>[2]</sup> Oral (rat) LD50: =500 mg/kg <sup>[2]</sup>	
<b>dicalcium hexaborate pentahydrate</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	Dermal (rabbit) LD50: >2000 mg/kg <sup>[2]</sup> Oral (rat) LD50: >5000 mg/kg <sup>[2]</sup>	Not Available
<b>styrene/ butadiene copolymer</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	Dermal (rabbit) LD50: >20000 mg/kg <sup>[2]</sup> Oral (rat) LD50: 71000 mg/kg <sup>[2]</sup>	Eye (rabbit) 500: mg/24h - Eye : Mild
<b>polyethylene</b>	<b>TOXICITY</b>	<b>IRRITATION</b>
	Dermal (rabbit) LD50: >2000 mg/kg <sup>[2]</sup> Inhalation (mouse) LC50: 1.5 mg/l/30m <sup>[2]</sup>	Not Available

## SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)

	Oral (rat) LD50: >3000 mg/kg <sup>[2]</sup>	
talc	<b>TOXICITY</b>	<b>IRRITATION</b>
	Oral (rat) LD50: >5000 mg/kg <sup>[1]</sup>	Eye: no adverse effect observed (not irritating) <sup>[1]</sup>
		Skin (human): 0.3 mg/3d-I mild
		Skin: no adverse effect observed (not irritating) <sup>[1]</sup>
glass, oxide	<b>TOXICITY</b>	<b>IRRITATION</b>
	Not Available	Not Available
<b>Legend:</b>	1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2. * Value obtained from manufacturer's SDS. Unless otherwise specified data extracted from RTECS - Register of Toxic Effect of chemical Substances	

<b>BITUMEN ROAD MAKING</b>	<b>WARNING:</b> This substance has been classified by the IARC as Group 2B: Possibly Carcinogenic to Humans.
<b>NAPHTHENIC DISTILLATE, HEAVY, HYDROTREATED (SEVERE)</b>	<p>Exposure to the material may result in a possible risk of irreversible effects. The material may produce mutagenic effects in man. This concern is raised, generally, on the basis of appropriate studies with similar materials using mammalian somatic cells in vivo. Such findings are often supported by positive results from in vitro mutagenicity studies.</p> <p>Studies indicate that normal, branched and cyclic paraffins are absorbed from the mammalian gastrointestinal tract and that the absorption of n-paraffins is inversely proportional to the carbon chain length, with little absorption above C30. With respect to the carbon chain lengths likely to be present in mineral oil, n-paraffins may be absorbed to a greater extent than iso- or cyclo-paraffins.</p> <p>The major classes of hydrocarbons have been shown to be well absorbed by the gastrointestinal tract in various species. In many cases, the hydrophobic hydrocarbons are ingested in association with dietary lipids. The dependence of hydrocarbon absorption on concomitant triglyceride digestion and absorption, is known as the "hydrocarbon continuum hypothesis", and asserts that a series of solubilising phases in the intestinal lumen, created by dietary triglycerides and their digestion products, afford hydrocarbons a route to the lipid phase of the intestinal absorptive cell (enterocyte) membrane. While some hydrocarbons may traverse the mucosal epithelium unmetabolised and appear as solutes in lipoprotein particles in intestinal lymph, there is evidence that most hydrocarbons partially separate from nutrient lipids and undergo metabolic transformation in the enterocyte. The enterocyte may play a major role in determining the proportion of an absorbed hydrocarbon that, by escaping initial biotransformation, becomes available for deposition in its unchanged form in peripheral tissues such as adipose tissue, or in the liver.</p> <p>The materials included in the Lubricating Base Oils category are related from both process and physical-chemical perspectives;</p> <p>The potential toxicity of a specific distillate base oil is inversely related to the severity or extent of processing the oil has undergone, since:</p> <ul style="list-style-type: none"> <li>• The adverse effects of these materials are associated with undesirable components, and</li> <li>• The levels of the undesirable components are inversely related to the degree of processing;</li> <li>• Distillate base oils receiving the same degree or extent of processing will have similar toxicities;</li> <li>• The potential toxicity of <i>residual base oils</i> is independent of the degree of processing the oil receives.</li> <li>• The reproductive and developmental toxicity of the distillate base oils is inversely related to the degree of processing.</li> </ul> <p>The degree of refining influences the carcinogenic potential of the oils. Whereas mild acid / earth refining processes are inadequate to substantially reduce the carcinogenic potential of lubricant base oils, hydrotreatment and / or solvent extraction methods can yield oils with no carcinogenic potential.</p> <p>Unrefined and mildly refined distillate base oils contain the highest levels of undesirable components, have the largest variation of hydrocarbon molecules and have shown the highest potential carcinogenic and mutagenic activities. Highly and severely refined distillate base oils are produced from unrefined and mildly refined oils by removing or transforming undesirable components. In comparison to unrefined and mildly refined base oils, the highly and severely refined distillate base oils have a smaller range of hydrocarbon molecules and have demonstrated very low mammalian toxicity. Mutagenicity and carcinogenicity testing of residual oils has been negative, supporting the belief that these materials lack biologically active components or the components are largely non-bioavailable due to their molecular size.</p> <p>Toxicity testing has consistently shown that lubricating base oils have low acute toxicities. Numerous tests have shown that a lubricating base oil's mutagenic and carcinogenic potential correlates with its 3-7 ring polycyclic aromatic compound (PAC) content, and the level of DMSO extractables (e.g. IP346 assay), both characteristics that are directly related to the degree/conditions of processing</p> <p>Skin irritating is not significant (CONCAWE) based on 14 tests on 10 CASs from the OLBO class (Other Lubricant Base Oils). Each study lasted for 24 hours, a period of time 6 times longer than the duration recommended by the OECD method).</p> <p>Eye irritation is not significant according to experimental data (CONCAWE studies) based on 9 "in vivo" tests on 7 CASs from the OLBO class (Other Lubricant Base Oils).</p> <p>Sensitisation: The substance does not cause the sensitization of the respiratory tract or of the skin. (CONCAWE studies based on 14 tests on 11 CASs from the OLBO class (Other Lubricant Base Oils))</p> <p>Germ cell mutagenicity: The tests performed within the 'in vivo' studies regarding gene mutation at mice micronuclei indicated negative results (CONCAWE studies. AMES tests had negative results in 7 studies performed on 4 CASs from the OLBO class (Other Lubricant Base Oils)).</p> <p>Reproduction toxicity: Reproduction / development toxicity monitoring according to OECD 421 or 422 methods. CONCAWE tests gave negative results in oral gavage studies. Pre-birth studies regarding toxicity in the unborn foetus development process showed a maternal LOAEL (Lowest Observed Adverse Effect Level) of 125 mg/kg body/day, based on dermal irritation and a NOAEL (No Observable Adverse Effect Level) of 2000 mg/kg body/day, which shows that the substance is not toxic for reproduction.</p> <p>STOT (toxicity on specific target organs) – repeated exposure: Studies with short term repeated doses (28-day test) on rabbit skin indicated the NOAEL value of 1000 mg/kg. NOAEL for inhalation, local effects &gt; 280 mg/m<sup>3</sup> and for systemic effects NOAEL &gt; 980 mg/m<sup>3</sup>.</p> <p>Sub-chronic toxicity</p> <p>90-day study Dermal: NOAEL &gt; 2000 mg/kg (CONCAWE studies).</p> <p>Repeat dose toxicity:</p> <p>Oral</p> <p>NOAEL for heavy paraffinic distillate aromatic extract could not be identified and is less than 125 mg/kg/day when administered orally.</p> <p>Inhalation</p> <p>The NOAEL for lung changes associated with oil deposition in the lungs was 220 mg/m<sup>3</sup>. As no systemic toxicity was observed, the overall NOAEL for systemic effects was &gt; 980 mg/m<sup>3</sup>.</p> <p>Dermal</p> <p>In a 90 day subchronic dermal study, the administration of Light paraffinic distillate solvent extract had an adverse effect on survivability, body weights, organ weights (particularly the liver and thymus), and variety of haematology and serum chemistry parameters in exposed animals. Histopathological changes which were treatment-related were most prominent in the adrenals, bone marrow, kidneys, liver, lymph nodes, skin, stomach, and thymus. Based on the results of this study, the NOAEL for the test material is less than 30 mg/kg/day.</p> <p>Toxicity to reproduction:</p> <p>Mineral oil (a white mineral oil) caused no reproductive or developmental toxicity with 1 mL/kg/day (i.e., 1000 mg/kg/day) in an OECD 421 guideline study, but did cause mild to moderate skin irritation. Therefore, the reproductive/developmental NOAEL for this study is =1000 mg/kg/day and no LOAEL was determined.</p> <p>Developmental toxicity, teratogenicity:</p> <p>Heavy paraffinic distillate furfural extract produced maternal, reproductive and foetal toxicity. Maternal toxicity was exhibited as vaginal discharge</p>

## SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)

	<p>(dose-related), body weight decrease, reduction in thymus weight and increase in liver weight (125 mg/kg/day and higher) and aberrant haematology and serum chemistry (125 and/or 500 mg/kg/day). Evidence of potential reproductive effects was shown by an increased number of dams with resorptions and intrauterine death. Distillate aromatic extract (DAE) was developmentally toxic regardless of exposure duration as indicated by increased resorptions and decreased foetal body weights. Furthermore, when exposures were increased to 1000 mg/kg/day and given only during gestation days 10 through 12, cleft palate and ossification delays were observed. Cleft palate was considered to indicate a potential teratogenic effect of DAE.</p> <p>The following Oil Industry Note (OIN) has been applied: OIN 8 - The classifications as a reproductive toxicant category 2; H361d (Suspected of damaging the unborn child) and specific target organ toxicant category 1; H372 (Causes damage to organs through prolonged or repeated exposure) need not apply if the substance is not classified as carcinogenic</p> <p>Toxicokinetics of lubricant base oils has been examined in rodents. Absorption of other lubricant base oils across the small intestine is related to carbon chain length; hydrocarbons with smaller chain length are more readily absorbed than hydrocarbons with a longer chain length. The majority of an oral dose of mineral hydrocarbon is not absorbed and is excreted unchanged in the faeces. Distribution of mineral hydrocarbons following absorption has been observed in liver, fat, kidney, brain and spleen. Excretion of absorbed mineral hydrocarbons occurs via the faeces and urine. Based on the pharmacokinetic parameters and disposition profiles, the data indicate inherent strain differences in the total systemic exposure (~4 fold greater systemic dose in F344 vs SD rats), rate of metabolism, and hepatic and lymph node retention of C26H52, which may be associated with the different strain sensitivities to the formation of liver granulomas and MLN histiocytosis.</p> <p><b>Highly and Severely Refined Distillate Base Oils</b></p> <p><b>Acute toxicity:</b> Multiple studies of the acute toxicity of highly &amp; severely refined base oils have been reported. Irrespective of the crude source or the method or extent of processing, the oral LD50s have been observed to be &gt;5 g/kg (bw) and the dermal LD50s have ranged from &gt;2 to &gt;5g/kg (bw). The LC50 for inhalation toxicity ranged from 2.18 mg/l to &gt; 4 mg/l.</p> <p>When tested for skin and eye irritation, the materials have been reported as "non-irritating" to "moderately irritating"</p> <p>Testing in guinea pigs for sensitization has been negative</p> <p><b>Repeat dose toxicity:</b> Several studies have been conducted with these oils. The weight of evidence from all available data on highly &amp; severely refined base oils support the presumption that a distillate base oil's toxicity is inversely related to the degree of processing it receives. Adverse effects have been reported with even the most severely refined white oils - these appear to depend on animal species and/or the peculiarities of the study.</p> <ul style="list-style-type: none"> <li>▶ The granulomatous lesions induced by the oral administration of white oils are essentially foreign body responses. The lesions occur only in rats, of which the Fischer 344 strain is particularly sensitive,</li> <li>▶ The testicular effects seen in rabbits after dermal administration of a highly to severely refined base oil were unique to a single study and may have been related to stress induced by skin irritation, and</li> <li>▶ The accumulation of foamy macrophages in the alveolar spaces of rats exposed repeatedly via inhalation to high levels of highly to severely refined base oils is not unique to these oils, but would be seen after exposure to many water insoluble materials.</li> </ul> <p><b>Reproductive and developmental toxicity:</b> A highly refined base oil was used as the vehicle control in a one-generation reproduction study. The study was conducted according to the OECD Test Guideline 421. There was no effect on fertility and mating indices in either males or females. At necropsy, there were no consistent findings and organ weights and histopathology were considered normal by the study's authors. A single generation study in which a white mineral oil (a food/ drug grade severely refined base oil) was used as a vehicle control is reported. Two separate groups of pregnant rats were administered 5 ml/kg (bw)/day of the base oil via gavage, on days 6 through 19 of gestation. In one of the two base oil dose groups, three malformed fetuses were found among three litters The study authors considered these malformations to be minor and within the normal ranges for the strain of rat.</p> <p><b>Genotoxicity:</b></p> <p><i>In vitro</i> (mutagenicity): Several studies have reported the results of testing different base oils for mutagenicity using a modified Ames assay Base oils with no or low concentrations of 3-7 ring PACs had low mutagenicity indices.</p> <p><i>In vivo</i> (chromosomal aberrations): A total of seven base stocks were tested in male and female Sprague-Dawley rats using a bone marrow cytogenetics assay. The test materials were administered via gavage at dose levels ranging from 500 to 5000 mg/kg (bw). Dosing occurred for either a single day or for five consecutive days. None of the base oils produced a significant increase in aberrant cells.</p> <p><b>Carcinogenicity:</b> Highly &amp; severely refined base oils are not carcinogens, when given either orally or dermally.</p> <p><b>NOTE:</b> Substance has been shown to be mutagenic in at least one assay, or belongs to a family of chemicals producing damage or change to cellular DNA.</p>
CALCIUM CARBONATE	<p>No evidence of carcinogenic properties. No evidence of mutagenic or teratogenic effects.</p> <p>The material may produce severe irritation to the eye causing pronounced inflammation. Repeated or prolonged exposure to irritants may produce conjunctivitis.</p> <p>The material may cause skin irritation after prolonged or repeated exposure and may produce a contact dermatitis (nonallergic). This form of dermatitis is often characterised by skin redness (erythema) and swelling the epidermis. Histologically there may be intercellular oedema of the spongy layer (spongiosis) and intracellular oedema of the epidermis.</p>
SILICA CRYSTALLINE - QUARTZ	<p><b>WARNING:</b> For inhalation exposure <u>ONLY</u>: This substance has been classified by the IARC as Group 1: <b>CARCINOGENIC TO HUMANS</b></p> <p>The International Agency for Research on Cancer (IARC) has classified occupational exposures to <b>respirable</b> (&lt;5 um) crystalline silica as being carcinogenic to humans . This classification is based on what IARC considered sufficient evidence from epidemiological studies of humans for the carcinogenicity of inhaled silica in the forms of quartz and cristobalite. Crystalline silica is also known to cause silicosis, a non-cancerous lung disease.</p> <p>Intermittent exposure produces; focal fibrosis, (pneumoconiosis), cough, dyspnoea, liver tumours.</p> <p>* Millions of particles per cubic foot (based on impinger samples counted by light field techniques).</p> <p>NOTE : the physical nature of quartz in the product determines whether it is likely to present a chronic health problem. To be a hazard the material must enter the breathing zone as respirable particles.</p>
DICALCIUM HEXABORATE PENTAHYDRATE	<p>* anticipated values based on similar inorganic borates - Tramo MSDS Similar inorganic borate compounds are low in acute oral toxicity; LD50 of colemanite in rats is expected to be greater than 5.000 mg/kg of body weight. Skin: Not tested. Similar inorganic borate compounds are low in acute dermal toxicity; LD50 of Colemanite in rabbits is expected to be greater than 2.000 mg/kg of body weight. Skin irritation: Not tested. Not expected to be irritating to skin based experience with other similar inorganic borate compounds. Eye irritation: Not tested. Not expected to be irritating to eyes based experienced with other similar inorganic borate compounds. Carcinogenicity/Mutagenicity: Colemanite has not been tested. However, studies conducted with the chemically similar substance boric acid have reported no evidence of carcinogenicity in mice and mutagenic activity in a battery of short-term mutagenicity assay</p>
STYRENE/ BUTADIENE COPOLYMER	<p>The material may be irritating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to irritants may produce conjunctivitis.</p>
POLYETHYLENE	<p>polyethylene pyrolyzate for poly-alpha-olefins (PAOs):</p> <p>PAOs are highly branched isoparaffinic chemicals produced by oligomerisation of 1-octene, 1-decene, and/or 1-dodecene. The crude polyalphaolefin mixture is then distilled into appropriate product fractions to meet specific viscosity specifications and hydrogenated. Read across data exist for health effects endpoints from the following similar <i>hydrogenated</i> long chain branched alkanes derived from a C8, C10, and/or C12 alpha olefins:</p> <ul style="list-style-type: none"> <li>▶ Decene homopolymer</li> <li>▶ Decene/dodecene copolymer</li> <li>▶ Octene/decene/dodecene copolymer</li> </ul>

## SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)

## ▸ Dodecene trimer

The data for these structural analogs demonstrated no evidence of health effects. In addition, there is evidence in the literature that alkanes with 30 or more carbon atoms are unlikely to be absorbed when administered orally. The physicochemical data suggest that it is unlikely that significant absorption will occur. If a substance of the size and structure of a typical PAO is absorbed, then the principal mechanisms of absorption after oral administration are likely to be passive diffusion and absorption by way of the lymphatic system. The former requires both good lipid solubility and good water solubility as the substance has to partition from an aqueous environment through a lipophilic membrane into another aqueous environment during absorption. Absorption by way of the lymphatics occurs by mechanisms analogous to those that absorb fatty acids and is limited by the size of the molecule. Lipophilicity generally enhances the ability of chemicals to cross biological membranes. Biotransformation by mixed function oxidases often increases the water solubility of a substance; however, existing data suggest that these substances will not undergo oxidation to more hydrophilic metabolites. Finally, a chemical must have an active functional group that can interact chemically or physically with the target cell or receptor upon reaching it; there are no moieties in PAOs that represent a functional group that may have biological activity. The water solubilities of a C10 dimer PAO and a C12 trimer PAO were determined to be <1 ppb and < 1 ppt respectively. The partition coefficient for a C12 trimer PAO was determined to be log Kow of >7. Given the very low water solubility it is extremely unlikely that PAOs will be absorbed by passive diffusion following oral administration, and the size of the molecules suggest that the extent of lymphatic absorption is likely to be very low. Although PAOs are relatively large lipophilic compounds, and molecular size may be a critical limiting determinant for absorption, there is some evidence that these substances are absorbed. However, the lack of observed toxicity in the studies with PAOs suggests that these products are absorbed poorly, if at all. Furthermore, a review of the literature regarding the absorption and metabolism of long chain alkanes indicates that alkanes with 30+ carbon atoms are unlikely to be absorbed. For example the absorption of squalane, an analogous C30 product, administered orally to male CD rats was examined - essentially all of the squalane was recovered unchanged in the faeces. At the same time, the hydrophobic properties of PAOs suggest that, should they be absorbed, they would undergo limited distribution in the aqueous systemic circulation and reach potential target organs in limited concentrations.

In addition to the general considerations discussed above, the low volatility of PAOs indicates that, under normal conditions of use or transportation, exposure by the inhalation route is unlikely. In particular, the high viscosity of these substances suggests that it would be difficult to generate a high concentration of respirable particles in the air.

**Acute toxicity:** PAOs (decene/dodecene copolymer, octene/decene/dodecene homo-polymer, and dodecene trimer) have been adequately tested for acute oral toxicity. There were no deaths when the test materials were administered at doses of 5,000 mg/kg (decene/dodecene copolymer and dodecene trimer) and at 2,000 mg/kg (octene/decene/dodecene copolymer) in rats. Overall, the acute oral LD50 for these substances was greater than the 2000 mg/kg limit dose, indicating a relatively low order of toxicity.

PAOs (decene/dodecene copolymer, octene/decene/dodecene copolymer, and dodecene trimer) have been tested for acute dermal toxicity. No mortality was observed for any substance when administered at the limit dose of 2000 or 5000 mg/kg. Overall, the acute dermal LD50 for these substances was greater than the 2000 mg/kg limit dose, indicating a relatively low order of toxicity.

1-Decene, homopolymer, is absorbed (unexpectedly for a high molecular weight polymer) to a moderate degree in rat skin and is eliminated slowly

PAOs (decene homopolymer, decene/dodecene copolymer, and decene trimer) have been tested for acute inhalation toxicity. Rats were exposed to aerosols of the substances at nominal atmospheric concentrations of 2.5, 5.0, and 5.06 mg/L, respectively, for four hours. These levels were the maximum attainable concentrations under the conditions of the tests, due to the low volatility and high viscosity of the test material. No mortality was noted, and all animals fully recovered following depuration. The lack of mortality at concentrations at or above the limit dose of 2.0 mg/L indicates a relatively low order of toxicity for these substances.

**Repeat dose toxicity:** Eight repeated-dose toxicity studies using two different animal species, rats and mice, and oral and dermal routes of administration have been conducted with three structural analogs. These data suggest that the structural analogs exhibit a low order of toxicity following repeated applications, due to their similarity in chemical structures and physicochemical properties.

One 28-day oral toxicity study in rats, one 90-day dermal and two 90-day dietary studies in rats, and a dermal carcinogenicity study in mice exist for decene homopolymer. A rat oral combined reproductive toxicity and 91-day systemic toxicity study was also conducted with decene homopolymer. In addition, 28-day rat oral toxicity studies exist for two structurally analogous substances (dodecene trimer and octene/decene/dodecene copolymer); and a 90-day rat dermal toxicity study exists for octene/decene/dodecene copolymer. Results from these studies show a low order of repeated dose toxicity. The dermal NOAEL for systemic toxicity studies was equal to or greater than 2000 mg/kg/day.

The oral NOAEL for 1-decene homopolymer is between 5,000 and 20,000 mg/kg/day in Sprague-Dawley rats.

Rats exposed repeatedly by dermal exposure at doses of 2000 mg/kg decene/dodecene copolymer showed increased incidences of hyperplasia of the sebaceous glands, hyperplasia/hyperkeratosis of the epidermis and dermal inflammation. These symptoms generally subsided within 2 weeks. Males showed decreased body weight gain and altered serum chemistry.

In a 90-day feeding study rats receiving 20000 ppm of 1-decene, homopolymer, hydrogenated did not exhibit any clinical signs of systemic toxicity. Marginal effects on clinical chemistry (glucose and ALT in males; sodium, phosphorus and calcium in females) were seen.

**Reproductive toxicity:** Data are available for decene homopolymer. Results from these studies show a low order of reproductive/ developmental toxicity. The NOAEL for reproductive toxicity was 1000 mg/kg/day, the highest concentration tested. The lack of effects on fertility in this study or effects on reproductive organs in this or other subchronic studies with closely related chemicals indicates that PAOs are unlikely to exert effects on reproduction.

**Developmental toxicity:** Decene homopolymer (with 10 ppm of an antioxidant) was administered once daily on gestation days 0-19 via dermal application to presumed-pregnant rats at doses of 0, 800, and 2000 mg/kg/day. Dermal administration of the test material did not adversely affect parameters of reproductive performance during gestation, nor did it adversely affect *in utero* survival and development of the offspring. The NOAEL in this study for developmental parameters was 2000 mg/kg/day.

**Genotoxicity:** Information for the following PAOs (decene homopolymer, octene/decene/dodecene copolymer, dodecene trimer; and decene/dodecene copolymer [prepared from 10% C12 and 90% C10 alpha olefins; approx. 33% trimer and 51% tetramer, 16% pentamer and higher]) is available. Either bacterial or mammalian gene mutation assays, *in vitro* chromosomal aberration assays, or *in vivo* chromosomal aberration assays have been conducted for these substances. Neither mutagenicity nor clastogenicity were exhibited by any of these substances in the referenced *in vivo* or *in vitro* tests, with or without metabolic activation.

**Carcinogenicity:** While alpha-olefin polymers have similar properties to mineral oils, they do not contain polycyclic aromatic hydrocarbons, or other known possible carcinogens.

Decene homopolymer produced no treatment-related tumors in C3H mice treated with a 50 ul/application twice weekly for 104 weeks. In addition, survival (56%) was greater than in any other group, including the untreated control.

Inclusion of polyethylene in the diet of rats at 8 g/kg/day did not result in treatment-related effects. Polyethylene implanted into rats and mice has reportedly caused local tumorigenic activity at doses of 33 to 2120 mg/kg, but the relevance to human exposure is not certain.

## TALC

For talc (a form of magnesium silicate)

The overuse of talc in nursing infants has resulted in pulmonary oedema, pneumonia and death within hours of inhaling talcum powder. The powder dries the mucous membranes of the bronchioles, disrupts pulmonary clearance, clogs smaller airways. Victims display wheezing, rapid or difficult breathing, increased pulse, cyanosis, fever. Mild exposure may cause relatively minor inflammatory lung disease.

Long term exposure may show wheezing, weakness, productive cough, limited chest expansion, scattered rales, cyanosis.

## GLASS, OXIDE

A similar spherical glass powder was nontoxic to rats at 5,000 mg/kg. All animals survived, gained weight and appeared active and healthy.

There were no signs of gross toxicity, adverse pharmacologic effects or abnormal behavior. There are no known reports of subchronic toxicity of nonfibrous glass. There are no known reports of carcinogenicity of nonfibrous glass. When tested for primary irritation potential, a similar material caused minimal irritation to eyes and was non-irritating to skin. Dust in excess of recommended exposure limits may result in irritation to the respiratory tract

SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)

<b>BITUMEN ROAD MAKING &amp; NAPHTHENIC DISTILLATE, HEAVY, HYDROTREATED (SEVERE) &amp; TALC &amp; GLASS, OXIDE</b>	No significant acute toxicological data identified in literature search.
<b>NAPHTHENIC DISTILLATE, HEAVY, HYDROTREATED (SEVERE) &amp; STYRENE/BUTADIENE COPOLYMER &amp; POLYETHYLENE &amp; TALC</b>	The substance is classified by IARC as Group 3: <b>NOT</b> classifiable as to its carcinogenicity to humans. Evidence of carcinogenicity may be inadequate or limited in animal testing.
<b>CALCIUM CARBONATE &amp; TALC</b>	Asthma-like symptoms may continue for months or even years after exposure to the material ceases. This may be due to a non-allergenic condition known as reactive airways dysfunction syndrome (RADS) which can occur following exposure to high levels of highly irritating compound. Key criteria for the diagnosis of RADS include the absence of preceding respiratory disease, in a non-atopic individual, with abrupt onset of persistent asthma-like symptoms within minutes to hours of a documented exposure to the irritant. A reversible airflow pattern, on spirometry, with the presence of moderate to severe bronchial hyperreactivity on methacholine challenge testing and the lack of minimal lymphocytic inflammation, without eosinophilia, have also been included in the criteria for diagnosis of RADS. RADS (or asthma) following an irritating inhalation is an infrequent disorder with rates related to the concentration of and duration of exposure to the irritating substance. Industrial bronchitis, on the other hand, is a disorder that occurs as result of exposure due to high concentrations of irritating substance (often particulate in nature) and is completely reversible after exposure ceases. The disorder is characterised by dyspnea, cough and mucus production.

<b>Acute Toxicity</b>	✗	<b>Carcinogenicity</b>	✗
<b>Skin Irritation/Corrosion</b>	✗	<b>Reproductivity</b>	✗
<b>Serious Eye Damage/Irritation</b>	✗	<b>STOT - Single Exposure</b>	✗
<b>Respiratory or Skin sensitisation</b>	✗	<b>STOT - Repeated Exposure</b>	✗
<b>Mutagenicity</b>	✗	<b>Aspiration Hazard</b>	✗

**Legend:** ✗ – Data either not available or does not fill the criteria for classification  
✔ – Data available to make classification

SECTION 12 Ecological information

Toxicity

SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)	Endpoint	Test Duration (hr)	Species	Value	Source
	Not Available	Not Available	Not Available	Not Available	Not Available
bitumen road making	<b>Endpoint</b>	<b>Test Duration (hr)</b>	<b>Species</b>	<b>Value</b>	<b>Source</b>
	LC50	96	Fish	>1-mg/L	2
	EC50	72	Algae or other aquatic plants	>1-mg/L	2
	NOEL	504	Crustacea	>=1-mg/L	2
naphthenic distillate, heavy, hydrotreated (severe)	<b>Endpoint</b>	<b>Test Duration (hr)</b>	<b>Species</b>	<b>Value</b>	<b>Source</b>
	LC50	96	Fish	>100mg/L	2
	EC50	48	Crustacea	>10-mg/L	2
	EC50	96	Algae or other aquatic plants	>1000mg/L	1
	NOEC	504	Crustacea	>1mg/L	1
calcium carbonate	<b>Endpoint</b>	<b>Test Duration (hr)</b>	<b>Species</b>	<b>Value</b>	<b>Source</b>
	EC50	72	Algae or other aquatic plants	>14mg/L	2
	EC10	72	Algae or other aquatic plants	>14mg/L	2
	NOEC	72	Algae or other aquatic plants	14mg/L	2
silica crystalline - quartz	<b>Endpoint</b>	<b>Test Duration (hr)</b>	<b>Species</b>	<b>Value</b>	<b>Source</b>
	Not Available	Not Available	Not Available	Not Available	Not Available
dicalcium hexaborate pentahydrate	<b>Endpoint</b>	<b>Test Duration (hr)</b>	<b>Species</b>	<b>Value</b>	<b>Source</b>
	Not Available	Not Available	Not Available	Not Available	Not Available
styrene/ butadiene copolymer	<b>Endpoint</b>	<b>Test Duration (hr)</b>	<b>Species</b>	<b>Value</b>	<b>Source</b>
	Not Available	Not Available	Not Available	Not Available	Not Available
polyethylene	<b>Endpoint</b>	<b>Test Duration (hr)</b>	<b>Species</b>	<b>Value</b>	<b>Source</b>
	Not Available	Not Available	Not Available	Not Available	Not Available

SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)

talc	Endpoint	Test Duration (hr)	Species	Value	Source
	LC50	96	Fish	89-581.016mg/L	2
	EC50	96	Algae or other aquatic plants	7-202.7mg/L	2
	NOEC	720	Crustacea	1-459.798mg/L	2

glass, oxide	Endpoint	Test Duration (hr)	Species	Value	Source
	LC50	96	Fish	>1-mg/L	2
	EC50	48	Crustacea	0.476mg/L	2
	EC50	96	Algae or other aquatic plants	0.002-0.655mg/L	2
NOEC	240	Algae or other aquatic plants	0.001-mg/L	2	

**Legend:** Extracted from 1. IUCLID Toxicity Data 2. Europe ECHA Registered Substances - Ecotoxicological Information - Aquatic Toxicity 3. EPIWIN Suite V3.12 (QSAR) - Aquatic Toxicity Data (Estimated) 4. US EPA, Ecotox database - Aquatic Toxicity Data 5. ECETOC Aquatic Hazard Assessment Data 6. NITE (Japan) - Bioconcentration Data 7. METI (Japan) - Bioconcentration Data 8. Vendor Data

**DO NOT** discharge into sewer or waterways.

**Persistence and degradability**

Ingredient	Persistence: Water/Soil	Persistence: Air
polyethylene	LOW	LOW

**Bioaccumulative potential**

Ingredient	Bioaccumulation
polyethylene	LOW (LogKOW = 1.2658)

**Mobility in soil**

Ingredient	Mobility
polyethylene	LOW (KOC = 14.3)

**SECTION 13 Disposal considerations**

**Waste treatment methods**

Product / Packaging disposal	
	<ul style="list-style-type: none"> <li>▶ Recycle wherever possible or consult manufacturer for recycling options.</li> <li>▶ Consult State Land Waste Management Authority for disposal.</li> <li>▶ Bury residue in an authorised landfill.</li> <li>▶ Recycle containers if possible, or dispose of in an authorised landfill.</li> </ul>

**SECTION 14 Transport information**

**Labels Required**

Marine Pollutant	
	NO
HAZCHEM	
	Not Applicable

**Land transport (ADG): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS**

**Air transport (ICAO-IATA / DGR): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS**

**Sea transport (IMDG-Code / GGVSee): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS**

**Transport in bulk according to Annex II of MARPOL and the IBC code**

Not Applicable

**SECTION 15 Regulatory information**

**Safety, health and environmental regulations / legislation specific for the substance or mixture**

**bitumen road making is found on the following regulatory lists**

<ul style="list-style-type: none"> <li>Australian Inventory of Industrial Chemicals (AIIC)</li> <li>International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs</li> </ul>	<ul style="list-style-type: none"> <li>International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs - Group 2B : Possibly carcinogenic to humans</li> </ul>
--	--

**naphthenic distillate, heavy, hydrotreated (severe) is found on the following regulatory lists**

<ul style="list-style-type: none"> <li>Australia Hazardous Chemical Information System (HCIS) - Hazardous Chemicals</li> <li>Australian Inventory of Industrial Chemicals (AIIC)</li> </ul>	<ul style="list-style-type: none"> <li>Chemical Footprint Project - Chemicals of High Concern List</li> <li>International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs</li> </ul>
---	--

**calcium carbonate is found on the following regulatory lists**

<ul style="list-style-type: none"> <li>Australian Inventory of Industrial Chemicals (AIIC)</li> </ul>
---

**silica crystalline - quartz is found on the following regulatory lists**

**SBS Modified Bitumen Waterproofing Membrane (without oxidized bitumen)**

Australia Hazardous Chemical Information System (HCIS) - Hazardous Chemicals  
Australian Inventory of Industrial Chemicals (AIIC)  
Chemical Footprint Project - Chemicals of High Concern List

International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs  
International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs - Group 1 : Carcinogenic to humans

**dicalcium hexaborate pentahydrate is found on the following regulatory lists**

Australia Hazardous Chemical Information System (HCIS) - Hazardous Chemicals

Australian Inventory of Industrial Chemicals (AIIC)

**styrene/ butadiene copolymer is found on the following regulatory lists**

Australian Inventory of Industrial Chemicals (AIIC)

International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs

**polyethylene is found on the following regulatory lists**

Australian Inventory of Industrial Chemicals (AIIC)

International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs

**talc is found on the following regulatory lists**

Australian Inventory of Industrial Chemicals (AIIC)  
Chemical Footprint Project - Chemicals of High Concern List

International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs  
International Agency for Research on Cancer (IARC) - Agents Classified by the IARC Monographs - Group 2B : Possibly carcinogenic to humans

**glass, oxide is found on the following regulatory lists**

Australian Inventory of Industrial Chemicals (AIIC)

**National Inventory Status**

National Inventory	Status
Australia - AIIC	Yes
Australia - Non-Industrial Use	No (bitumen road making; naphthenic distillate, heavy, hydrotreated (severe); calcium carbonate; silica crystalline - quartz; dicalcium hexaborate pentahydrate; styrene/ butadiene copolymer; polyethylene; talc; glass, oxide)
Canada - DSL	No (dicalcium hexaborate pentahydrate)
Canada - NDSL	No (bitumen road making; naphthenic distillate, heavy, hydrotreated (severe); silica crystalline - quartz; dicalcium hexaborate pentahydrate; styrene/ butadiene copolymer; polyethylene; talc; glass, oxide)
China - IECSC	No (dicalcium hexaborate pentahydrate)
Europe - EINEC / ELINCS / NLP	No (dicalcium hexaborate pentahydrate; styrene/ butadiene copolymer; polyethylene)
Japan - ENCS	No (bitumen road making; dicalcium hexaborate pentahydrate; glass, oxide)
Korea - KECI	No (dicalcium hexaborate pentahydrate)
New Zealand - NZIoC	Yes
Philippines - PICCS	No (dicalcium hexaborate pentahydrate)
USA - TSCA	No (dicalcium hexaborate pentahydrate)
Taiwan - TCSI	Yes
Mexico - INSQ	No (dicalcium hexaborate pentahydrate)
Vietnam - NCI	Yes
Russia - ARIPS	Yes
<b>Legend:</b>	Yes = All CAS declared ingredients are on the inventory No = One or more of the CAS listed ingredients are not on the inventory and are not exempt from listing (see specific ingredients in brackets)

**SECTION 16 Other information**

<b>Revision Date</b>	20/10/2020
<b>Initial Date</b>	20/10/2020

**Other information**

Classification of the preparation and its individual components has drawn on official and authoritative sources as well as independent review by the Chemwatch Classification committee using available literature references.

The SDS is a Hazard Communication tool and should be used to assist in the Risk Assessment. Many factors determine whether the reported Hazards are Risks in the workplace or other settings. Risks may be determined by reference to Exposures Scenarios. Scale of use, frequency of use and current or available engineering controls must be considered.

**Definitions and abbreviations**

PC – TWA: Permissible Concentration-Time Weighted Average  
PC – STEL: Permissible Concentration-Short Term Exposure Limit  
IARC: International Agency for Research on Cancer  
ACGIH: American Conference of Governmental Industrial Hygienists  
STEL: Short Term Exposure Limit  
TEEL: Temporary Emergency Exposure Limit.  
IDLH: Immediately Dangerous to Life or Health Concentrations  
OSF: Odour Safety Factor  
NOAEL :No Observed Adverse Effect Level  
LOAEL: Lowest Observed Adverse Effect Level  
TLV: Threshold Limit Value  
LOD: Limit Of Detection  
OTV: Odour Threshold Value  
BCF: BioConcentration Factors

BEI: Biological Exposure Index

This document is copyright.

Apart from any fair dealing for the purposes of private study, research, review or criticism, as permitted under the Copyright Act, no part may be reproduced by any process without written permission from CHEMWATCH.

TEL (+61 3) 9572 4700.